



NORDICA CHEVRON | WILTON  
FLATWOVEN

ROLS  
WOOL CARPETS



# NORDICA CHEVRON


**ROLS**  
WOOL CARPETS



Haze



Overcast

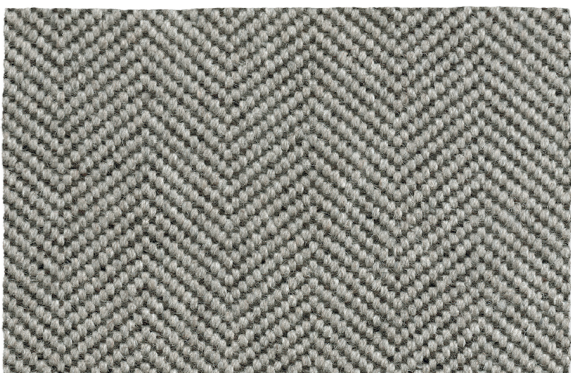


Mist



Storm



Twilight

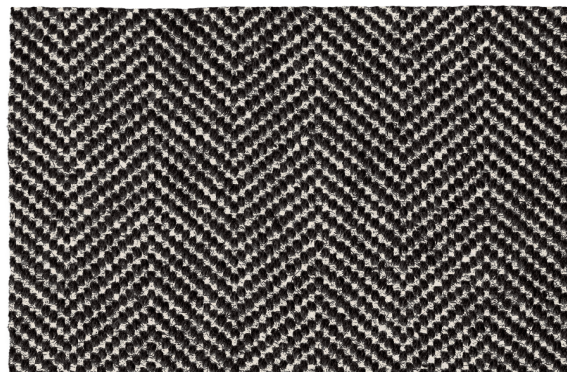

Midnight

## TECHNICAL INFORMATION:

MANUFACTURING METHOD  
Wilton Flatwoven

PILE HEIGHT  
± 3,0 mm

PILE SURFACE  
Loop Pile

TOTAL CARPET THICKNESS  
± 4,0 mm

PILE COMPOSITION  
100% Wool

BACKING  
PP, Cotton & Latex

N° TUFTS  
± 179.200/m<sup>2</sup>

MANUFACTURING WIDTH  
4 m


PILE WEIGHT  
± 1.200 g/m<sup>2</sup>

FIRE CLASSIFICATION  
B<sub>f</sub>s1

TOTAL CARPET WEIGHT  
± 2.150 g/m<sup>2</sup>

PATTERN REPEAT (L x W)  
0,8 x 7,5 cm

PATTERN MATCH  
Straight Match

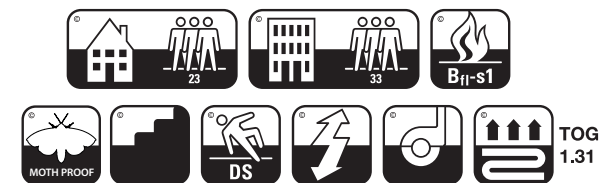

LEED®: Nordica fulfills the requirements for LEED certified buildings (EQC 4.3)



### INSTALLATION (WALL-TO-WALL)

Please visit [www.moquetasrols.com](http://www.moquetasrols.com) to download our Quick Fit Guide containing important information relative to the planning & installation of this collection.



### CARE & MAINTENANCE

Please visit [www.moquetasrols.com](http://www.moquetasrols.com) to download our Carpet Care and Maintenance booklet containing useful tips on vacuuming, preventative, regular and occasional maintenance solutions and procedures and important guidance for spot cleaning.

